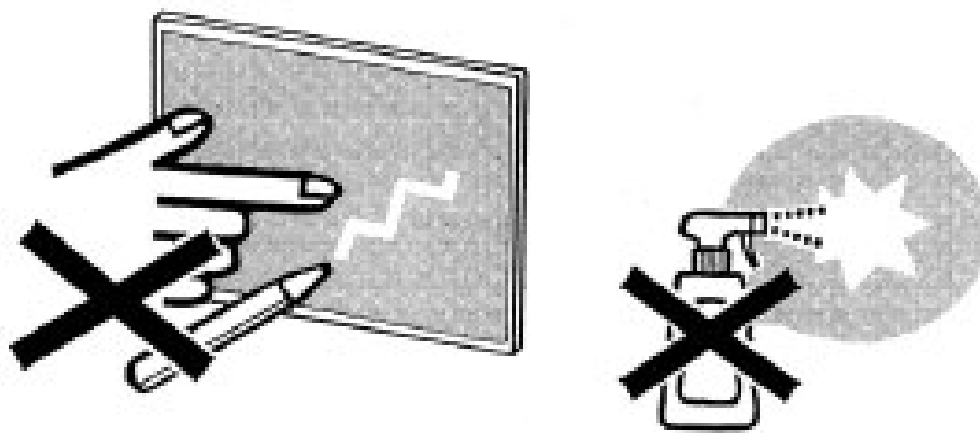


**CAUTION****CAUTION**

Due to the precise physical properties of the screen, please pay attention to the following guidelines.

1. Do not touch the screen surface with any hard objects. Please take special care to avoid damage by fingernails.
2. Do not allow any oil-based products to come in contact with the screen surface.
3. Never use any alcohol-based cleaners.
4. Please wipe any dust from the screen surface with a soft static-free cloth or brush.

## Tools for installations

- rubber spatula (soft rubber)
- sprayer
- neutral cleanser
- water
- measure

It is a standard about 15 ~ 20 drops to 1-Liter water. Adjust to make smoother installation. Installation to Glass may need less dish washing liquid. Dry environment may need some more.

1. Clean the surface up on the glass window/ acrylic plate (further referred to as "glass") where screen install.






- Spray well the water to glass surface for remove the dust and dirt on it.
- Scrape out the water by rubber spatula.

2. Make the mark on the glass by something like masking tapes to the position where the screen putting.


3. Confirm about adhesive surface side of the screen film.

- To see and make sure which is the separator and screen itself, put scotch tape to the screen film corner and remove just a little bit. Now you see thicker film (Screen itself) and thinner film (separator for protect adhesive surface).
- Thicker film is the screen, do not touch its back side by your fingers there is sticky adhesive surface.

4. Spray neutral cleanser contained water (15 ~ 20 drops to 1 liter water) to glass surface, and keep wet.

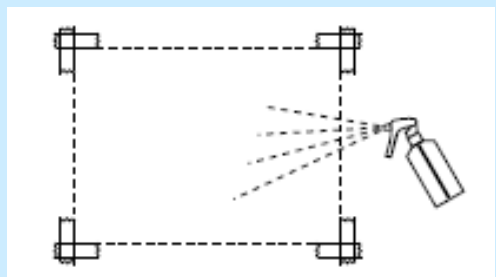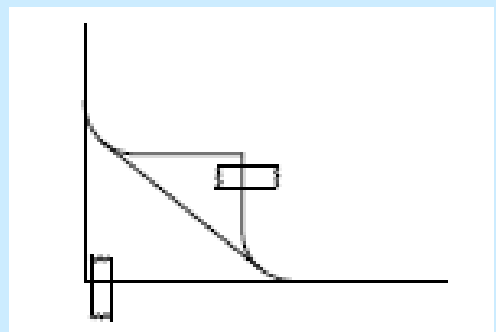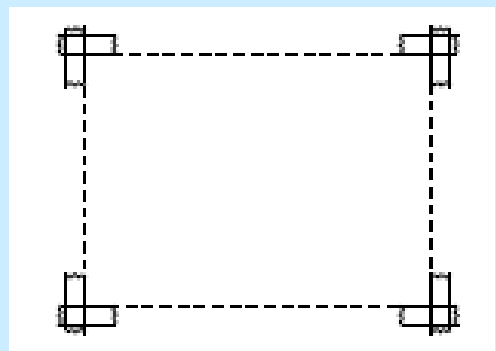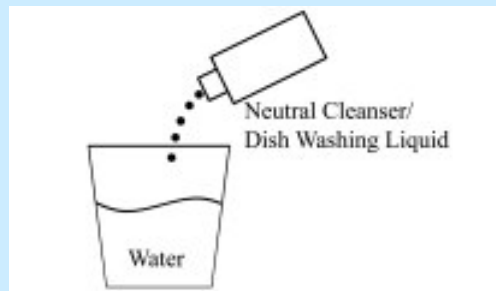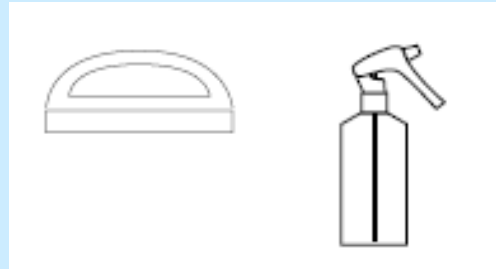


5. Separator removing from the screen film and water spraying well simultaneously about adhesive surface.

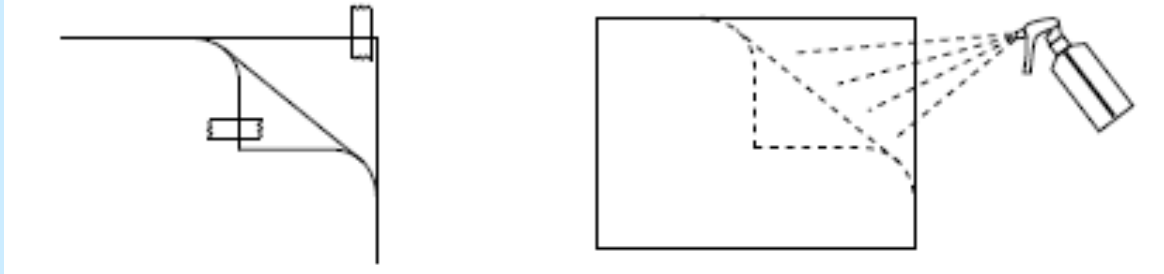


6. Put the screen to the glass in the position of installation and adjust the position to fit completely. Adhesive surface side should be down (face to glass).

7. Spray neutral cleanser contained water (15 ~ 20 drops to 1 litter water) to screen surface (not adhesive side) too for smooth water & air wiping/kicking out from the screen surface & glass.

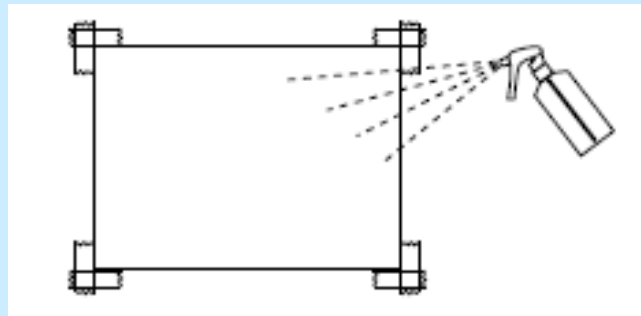

8. Push out the water that is between screen & glass to outside by using rubber spatula.

- For smooth work of rubber spatula and to avoid damage the screen film, it would be better to spray the water to screen surface well where the surface you rub by spatula.
- Move the rubber spatula from the centre to the edge of screen.
- Take care about bubble not remaining in the screen.
- Be careful not to scratch or crumple the screen.

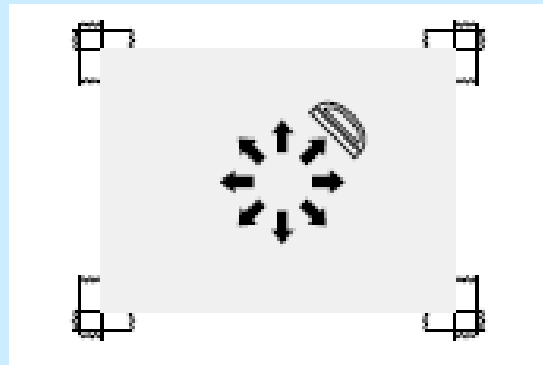

9. Confirm about no bubble remaining the screen.

- In case there could not be take off the bubble, may be possible use needle to make really small hole for bubble air out.

10. Take off all the masking tapes or scotch tapes used for marking the position.

11. Wipe the screen surface with soft cloth and water and clean the neutral cleanser.

12. Do not touch the screen 1~2 days till screen being completely dry.